


FEP LINED LOW DENSITY POLYETHYLENE TUBING

Key Features: Liner Chemically Inert to Most Industrial Fluids and Gasses; Jacket Resists Most Weak Acids, Bases and Strong Oxidizing Acids; No Plasticiser to Leach Out into Fluids; FDA Compliant; Cleans Easily and Does Not Absorb Liquids; Minus 32 to 82°C. Complies with EPA SESDPROC-301-R1.

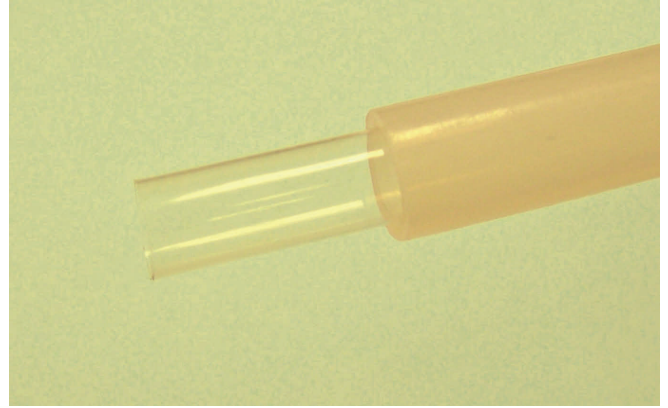

OD In	ID In	Liner Thk	Bend Rad., In	Max psi at 70 °F	Part Number 100 ft. Coil	Part Number 500 ft. spool	Part Number 1,000 ft. spool
1/4	1/8	.010	1.00	85	FP47N62 P0B	FP47N62 P0C	FP47N62 P0D
1/4	.170	.010	1.50	80	FP06N40 P0B	FP06N40 P0C	FP06N40 P0D
1/4	3/16	.010	2.00	75	FP49N32 P0B	FP49N32 P0C	FP49N32 P0D
5/16	1/4	.010	2.00	70	FP51N32 P0B	FP51N32 P0C	FP51N32 P0D
3/8	1/4	.010	2.00	55	FP51N62 P0B	FP51N62 P0C	FP51N62 P0D
7/16	3/8	.012	3.50	50	FP55N31 P0B	FP55N31 P0C	FP55N31 P0D
1/2	3/8	.012	3.50	50	FP55N61 P0B	FP55N61 P0C	FP55N61 P0D
5/8	1/2	.012	6.00	40	FP59N62 P0B	FP59N62 P0C	FP59N62 P0D